


# BT Series

## Sampling valve for low or unpressurized systems up to 220 cSt viscosity

- Consistently sample active oil from gearboxes and reservoirs
- Avoid problems caused by sedimentation or settled oil
- Avoid opening the system to external contamination
- Bend tubing to the ideal sampling location. Swivel option (-S) available for bent tubes in confined locations
- Easily installs in drain, fill or pipe ports



### Overview

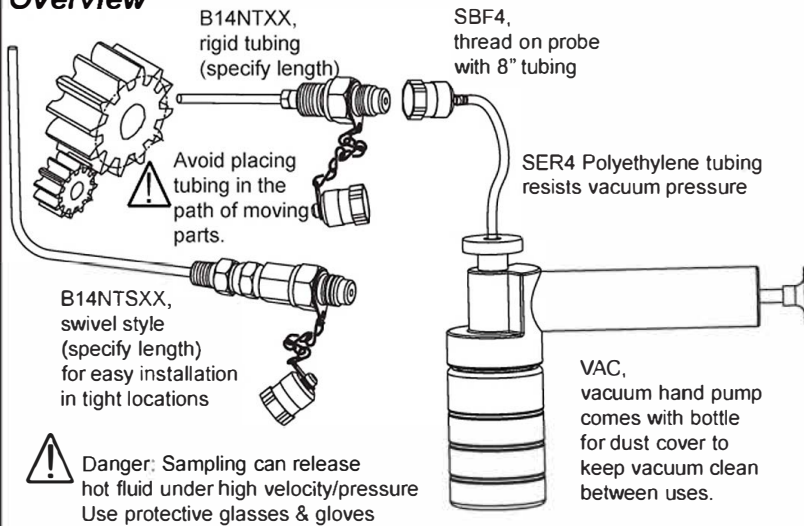


### Steel Sampling Valves

Part#	Description
B14NT12	M16x2, 1/4" NPT, 12" Rigid
B14NT18	M16x2, 1/4" NPT, 18" Rigid
B14NT24	M16x2, 1/4" NPT, 24" Rigid
B14NTS12	M16x2, 1/4" NPT, 12" Swivel
B14NTS18	M16x2, 1/4" NPT, 18" Swivel
B14NTS24	M16x2, 1/4" NPT, 24" Swivel

\* Viton seals standard. Custom lengths are available. See Port adapters for other threads.

### Angle Cut Tubing

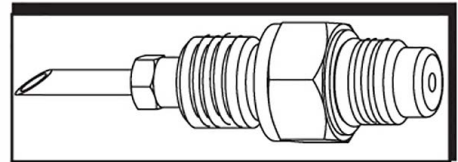

Cut tube on angle for slow flowing fluids or add -A and we will angle cut it for you.

### Stainless Steel Sampling Valves

Part#	Description
B14NTRXX	M16x2, 1/4" NPT, XX" Rigid SS tube, Steel valve
B14NRTXX	M16x2, 1/4" NPT, XX" Rigid Steel tube, SS valve
B14NRTRXX	M16x2, 1/4" NPT, XX" Rigid SS tube, SS valve
B14NTRSXX	M16x2, 1/4" NPT, XX" Swivel SS tube, Steel valve
B14NRTSXX	M16x2, 1/4" NPT, XX" Swivel Steel tube, SS valve
B14NRTRSXX	M16x2, 1/4" NPT, XX" Swivel SS tube, SS valve

\* Replace XX with length in inches. Viton seals are standard on stainless steel valves. Stainless steel is 316 stainless steel.

### Accessories

Part#	Description
SBF4	Thread on probe & tubing
SER4	Thick polyethylene tubing
VAC	Vacuum with bottle
LC	Sample bottle with cap



Lubrication Technologies, Inc.  
120 Bosworth Street  
West Springfield, MA 01089

413-788-LUBE (5823)  
Fax 413-218-5823  
www.LubeTechnologies.com