
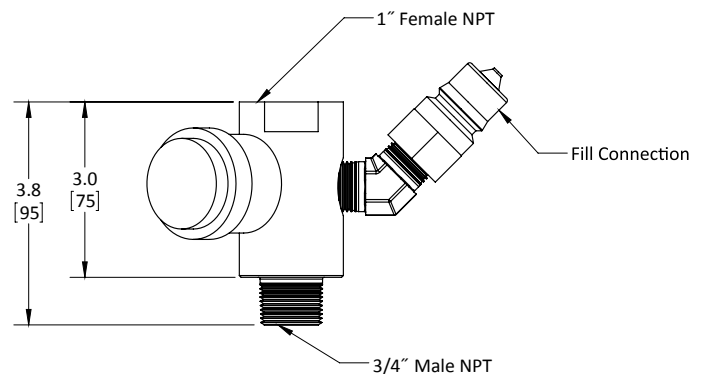


# INSTALLATION INSTRUCTIONS

## Xtract™ Gearbox Adapter Kit

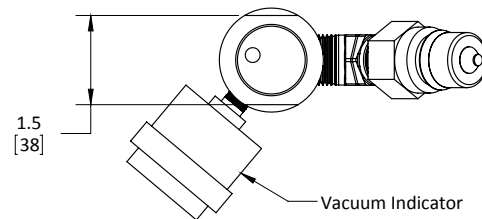

### Before Installation

1. Verify that thread size on provided gearbox breather adapter matches breather port.
2. Verify that there is clearance of at least 14 inches above reservoir breather port.
3. Obtain fitting that will adapt provided quick connect (or drain connector) to drain port on your reservoir.
4. Drain fluid from gearbox during system shutdown.
5. Verify that fill tube will not interfere with internal components.

### Included in this Kit

- Gearbox breather adapter with fill connector
- Vacuum indicator
- Drain connector
- Desiccant breather



# INSTALLATION INSTRUCTIONS

## Installing Adapter to Gearbox

1. Read and follow "Before Installation" guide at beginning of this instruction sheet.
2. Thread vacuum indicator and fill connector into side of the adapter. Hand-tighten only.
3. Set assembled adapter on a clean surface.
4. Remove existing breather cap from gearbox.
5. Clean surface closely surrounding breather port.
6. Thread gearbox adapter into  $\frac{3}{4}$ " NPT port on top surface of gearbox.
7. Remove red plugs from provided desiccant breather as indicated in breather installation procedures. Failure to do this will cause damage to system.
8. Thread desiccant breather onto top side of adapter until O-ring seals between adapter and breather surface. Hand-tighten only.

## Additional Support

Lubrication Engineers may be able to provide special fittings and fasteners that will aid in installation of this product. Please contact Customer Service at 800-537-7683 with questions regarding installation or servicing of this product.

## LE's Full Line of Xtract Filtration Adapter Kits



**Gearbox Adapter**



**Hydraulic Adapter**



**Tote Adapter**



**Drum Adapter**

Xtract™ is a trademark of Lubrication Engineers, Inc.

LEX\_GBAKII\_145 08-17