


ELECTRIC GREASE PUMP PACKAGE FOR EXCAVATOR



The KPL-24 High Pressure Electric Grease Pump has the ability to operate on just about any kind of mobile or stationary mining or construction equipment as it has a vibration resistance of 4G for all ground equipment.

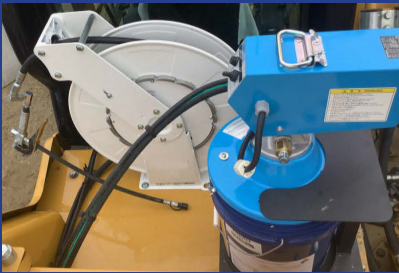

Features:

- High discharge pressure - 4000 psi max
- Engineered specifically for 5 gal / 35 lb. grease pail. The revolutionary design of the follower plate will empty the container completely.
- The KPL-24 is powered by a 24-volt DC motor
- Includes 50 foot 3/8" heavy-duty hose reel with control valve
- Custom-made heavy-duty hold down
- Allows greasing of host machine as well as machines adjacent to it
- Pumps may be used in conjunction with a divider valve and timer for automatic lubrication

GREASES TO USE



Manufacturer's Representative

NON HARDENING - NON SEPARATING



ALMAGARD™



ALMAMOLY™



Perfect for demolition equipment allowing lubrication of the host machine as well as adjacent machines

ELECTRIC GREASE PUMP PACKAGE FOR EXCAVATOR

Pump Information



Rating	Continuous Rating	30 Minute Rating
Discharge Volume	80 - 120 Grams/Min	70 - 80 grams/min
Discharge Pressure	0 - 3480 psi	3480 - 4061 psi
Max. Discharge Pressure	4061 psi (30 minute rating)	
Revolutions Per Hour	95 - 1:08 rpm	
Power Supply	24 V DC, 100 - 130 W/2.0 - 7.5 A	
Vibration Resistance	4 G	
Applicable Grease	NLGI NO. 0 - 2	
Applicable Temperature	14°F - 104°F	
Weight	26 lbs	

